


A B C D E

版次	ECN 编码	描述		设计/日期
2	EL24010043	改前	改后	江蒙_2024/01/29
		增加厚金区域		
3	EL24030044	增加包装规范		张文浩_2024/03/25

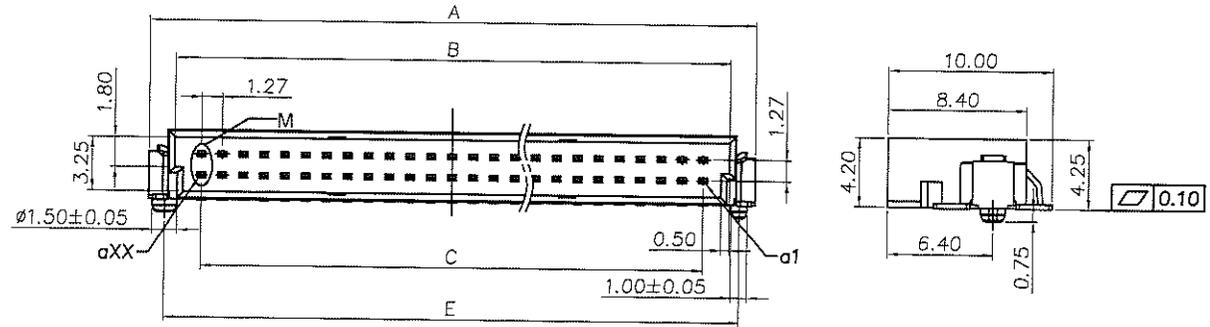


- NOTES: (Unless otherwise specified)
1. Dimension shall be interpreted per ANSI Y14.5M.
 2. Materials:
Insulator material: LCP, UL 94V-0; Color: Black.
Contact material: Copper alloy.
 3. Current Rating: 1.7A.
 4. Voltage Rating: 30V AC/DC.
 5. Working Temperature: -55°C ~ +125°C.
 6. Harmful material should be compliant to doc. "EI-0005" standards.
 7. Product number matrix:



LCSBAXXXKX00

Number of contacts ——— Plating Code:
K: REEL

Definition	Code
⊙ Tin plated	A
⊙ Gold plated:	
flash B	5u" D 10u" E
15u" F	20u" G 30u" J
⊙ Duplex plating:	
flash K	5u" M 10u" N
15u" P	20u" Q 30u" U
⊙ Standard: B	
⊙ All plating is lead free.	

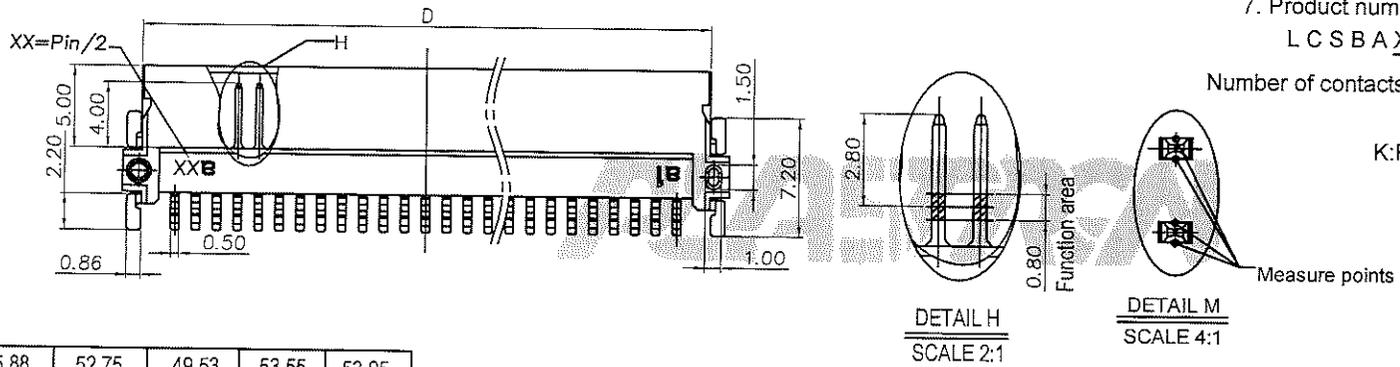


80	55.88	52.75	49.53	53.55	53.95
68	48.26	45.13	41.91	45.93	46.33
50	36.83	33.70	30.48	34.50	34.90
40	30.48	27.35	24.13	28.15	28.55
32	25.40	22.27	19.05	23.07	23.47
26	21.59	18.46	15.24	19.26	19.66
20	17.78	14.65	11.43	15.45	15.85
16	15.24	12.11	8.89	12.91	13.31
12	12.70	9.57	6.35	10.37	10.77
NO. of Contacts	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E

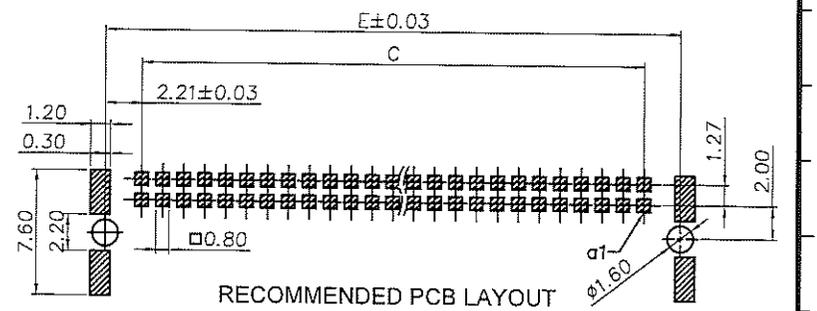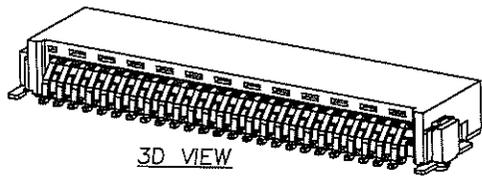


	TOLERANCE TABLE		SCALE	2.5:1	DRAWN	张文浩	DATE	2024/03/25	DWG. NO.	461-0000-0291	TITLE	REV.
	X ± 0.30	X° ± 3°	UNIT	mm	CHECK	江蒙	DATE	2024/03/26	PARTS NO. (INTENDED USE)			CUSTOMER DRAWING
	.X ± 0.25	.X° ± 2°	SIZE	A4	APPROVE	朱文祥	DATE	2024/03/26		LCSBAXXXKX00	SHEET	
	.XX ± 0.20										1/3	

A B C D E

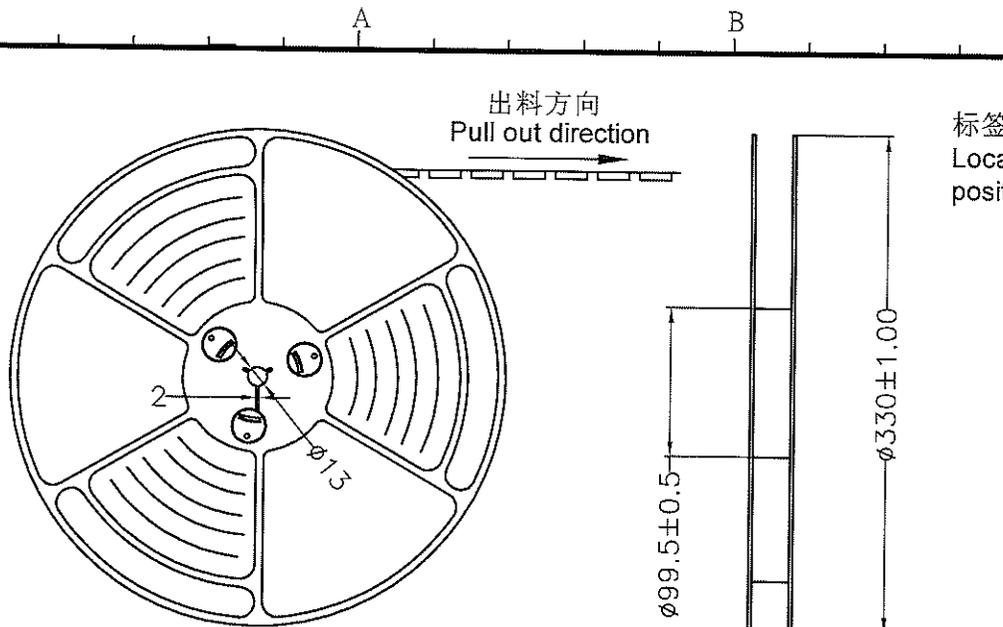


标签黏贴处(朝卷装包材的小定位孔一侧)
Location of label sticking (label at small positioning hole of the carrier tape side)

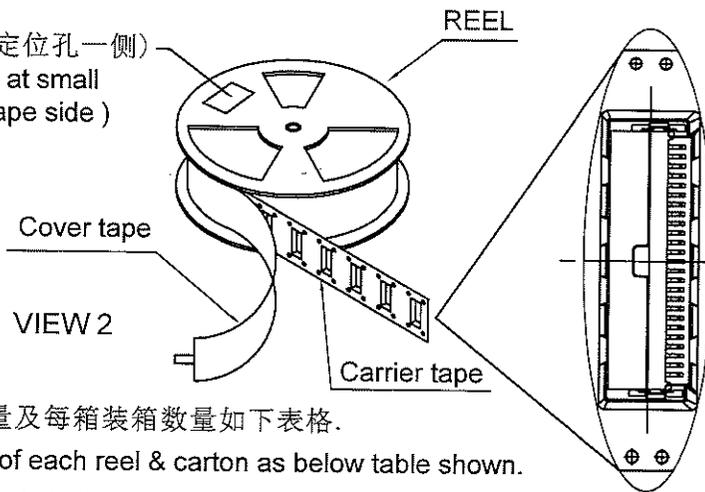

备注(NOTES):

- 每卷包装数量及每箱装箱数量如下表格。
Packing q'ty of each reel & carton as below table shown.
- 上胶带覆盖下包装带用自粘包装。
Use cover tape to cover and seal up.
- 每个纸箱放2个珍珠棉。
Every carton use 2pcs EPE.
- 将装满产品的卷盘放入纸箱以胶带封口。
Put reels in the carton and use adhesive tape to seal up.

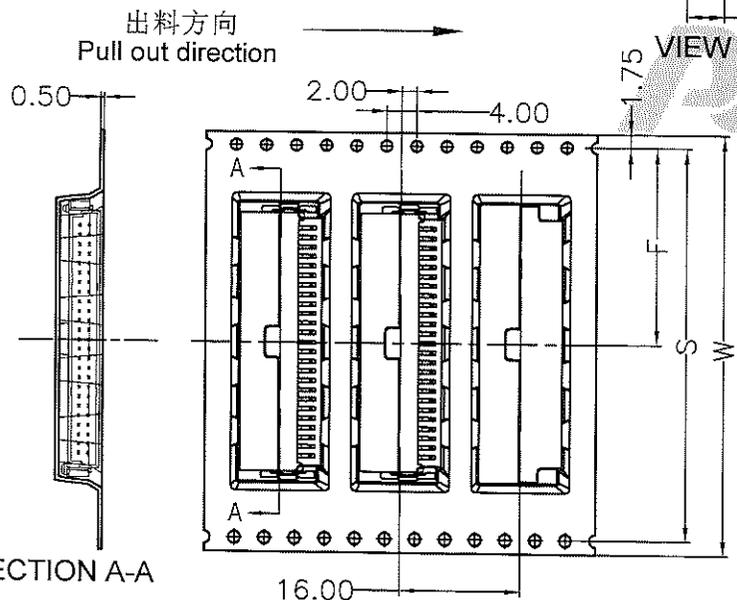

产品料号 (Product No.)	尺寸(Dimension)			包装容量(Packing capacity)		
	W	S	F	PCS/REEL	REELS/CARTON	PCS/CARTON
LCSBA012KX00	24.00		11.50	700	7	4900
LCSBA016KX00	32.00	28.40	14.20	700	5	3500
LCSBA020KX00	32.00	28.40	14.20	700	5	3500
LCSBA026KX00	44.00	40.40	20.20	700	4	2800
LCSBA032KX00	44.00	40.40	20.20	700	4	2800
LCSBA040KX00	44.00	40.40	20.20	700	4	2800
LCSBA050KX00	56.00	52.40	26.20	700	3	2100
LCSBA068KX00	72.00	68.40	34.20	700	2	1400
LCSBA080KX00	72.00	68.40	34.20	700	2	1400



TOLERANCE TABLE	
X ± 0.30	X° ± 3°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	

SCALE	1:1
UNIT	mm
SIZE	A4


DRAWN	张文浩
CHECK	15020
APPROVE	宋文静

DATE	2024/03/25
DATE	2024/03/26
DATE	2024/03/26

DWG. NO.	461-0000-0291
PARTS NO.(INTENDED USE)	LCSBAXXXKX00

TITLE	CUSTOMER DRAWING
-------	------------------

REV.	3
SHEET	2/3

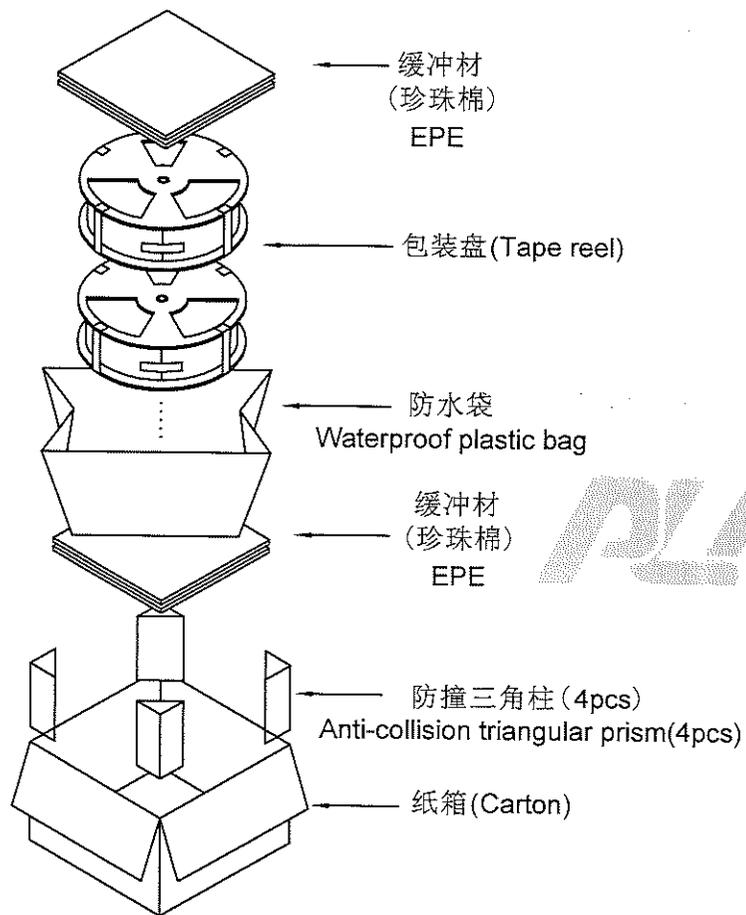

VIEW 3


备注 (NOTES):

1. 带子引导长度如下.

Lead tape length

转绕方向

Pull out direction

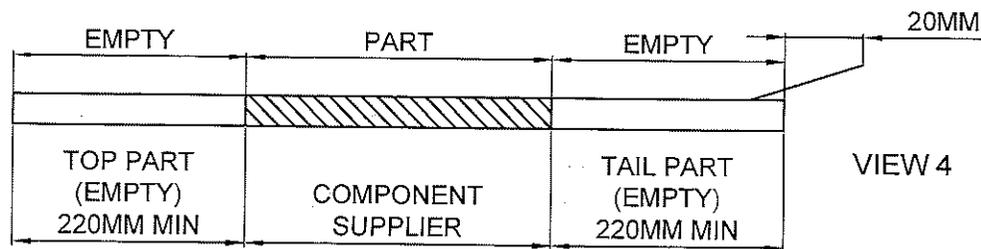

VIEW 4


2. 上带剥拉力为: 0.2~1.3N (20gf~130gf)

Peeling off force of top tape :0.2~1.3N(20gf~130gf)

出货运输过程中一定注意: 卷带在运输过程中不能散开

This requirement should be applied at shipment:

The reel tape can not be separated during transportation.

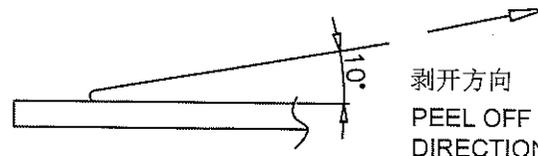

剥开方向
PEEL OFF
DIRECTION

VIEW 5



TOLERANCE TABLE		SCALE	DRAWN	DATE	DWG. NO.	TITLE	REV.
X ± 0.30	X° ± 3°	1:1	张文浩	2024/03/25	461-0000-0291	CUSTOMER DRAWING	3
.X ± 0.25	.X° ± 2°	UNIT	CHECK	DATE			REV.
.XX ± 0.20		mm	12/26	2024/03/26	PARTS NO.(INTENDED USE) LCSBAXXXKX00	SHEET 3/3	
		SIZE	APPROVE	DATE			
		A4	朱宇辉	2024/03/26			

A

B

C

D

E