

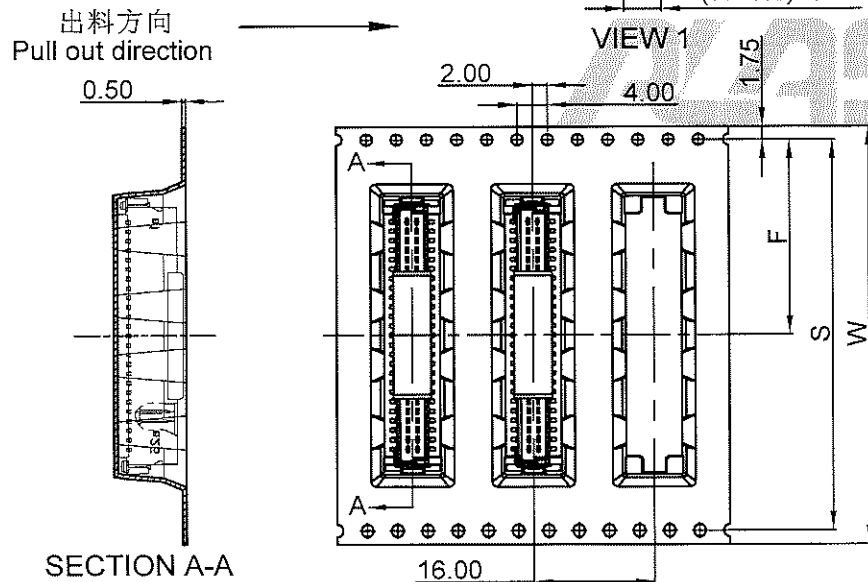


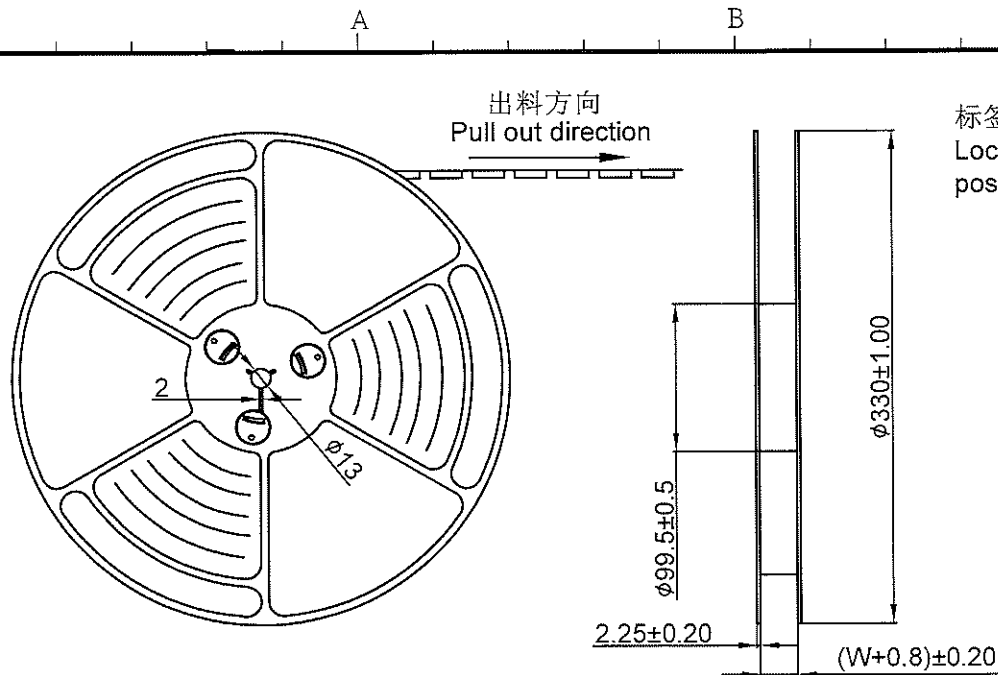

标签黏贴处(朝卷装包材的小定位孔一侧)
Location of label sticking (label at small positioning hole of the carrier tape side)

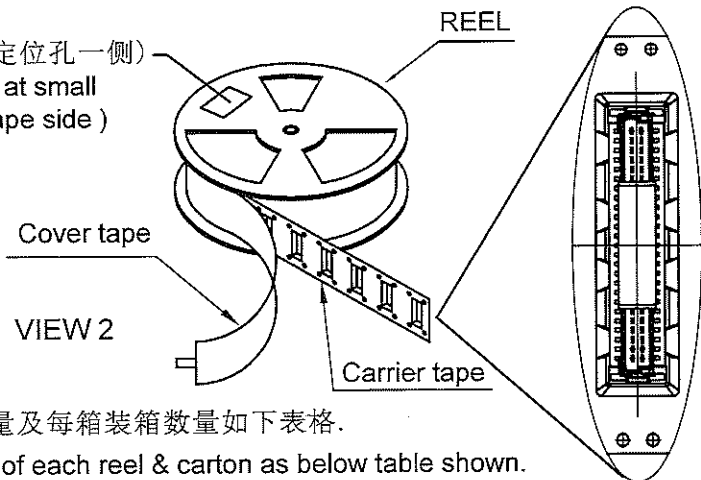


备注(NOTES):

- 每卷包装数量及每箱装箱数量如下表格。
Packing q'ty of each reel & carton as below table shown.
- 上胶带覆盖下包装带用自粘包装。
Use cover tape to cover and seal up.
- 每个纸箱放2个珍珠棉。
Every carton use 2pcs EPE.
- 将装满产品的卷盘放入纸箱以胶带封口。
Put reels in the carton and use adhesive tape to seal up.

产品料号 (Product No.)	尺寸(Dimension)			包装容量(Packing capacity)		
	W	S	F	PCS/REEL	REELS/CARTON	PCS/CARTON
LCRAA012RX00	24.00		11.50	450	7	3150
LCRAA016RX00	32.00	28.40	14.20	450	5	2250
LCRAA020RX00	32.00	28.40	14.20	450	5	2250
LCRAA026RX00	44.00	40.40	20.20	450	4	1800
LCRAA032RX00	44.00	40.40	20.20	450	4	1800
LCRAA040RX00	44.00	40.40	20.20	450	4	1800
LCRAA050RX00	56.00	52.40	26.20	450	3	1350
LCRAA068RX00	72.00	68.40	34.20	450	2	900
LCRAA080RX00	72.00	68.40	34.20	450	2	900

	TOLERANCE TABLE		SCALE 1:1		DRAWN 张文浩		DATE 2024/03/27		DWG. NO. 600-0000-2397		TITLE		REV. 2	
	X. ± 0.30	X.° ± 3°	UNIT mm		CHECK 何文强		DATE 2024/03/28		PARTS NO.(INTENDED USE) LCRAAXXXRX00		CUSTOMER DRAWING		SHEET 2/3	
	.X ± 0.25	.X° ± 2°	SIZE A4 		APPROVE 何文强		DATE 2024/03/27							
	.XX ± 0.20													

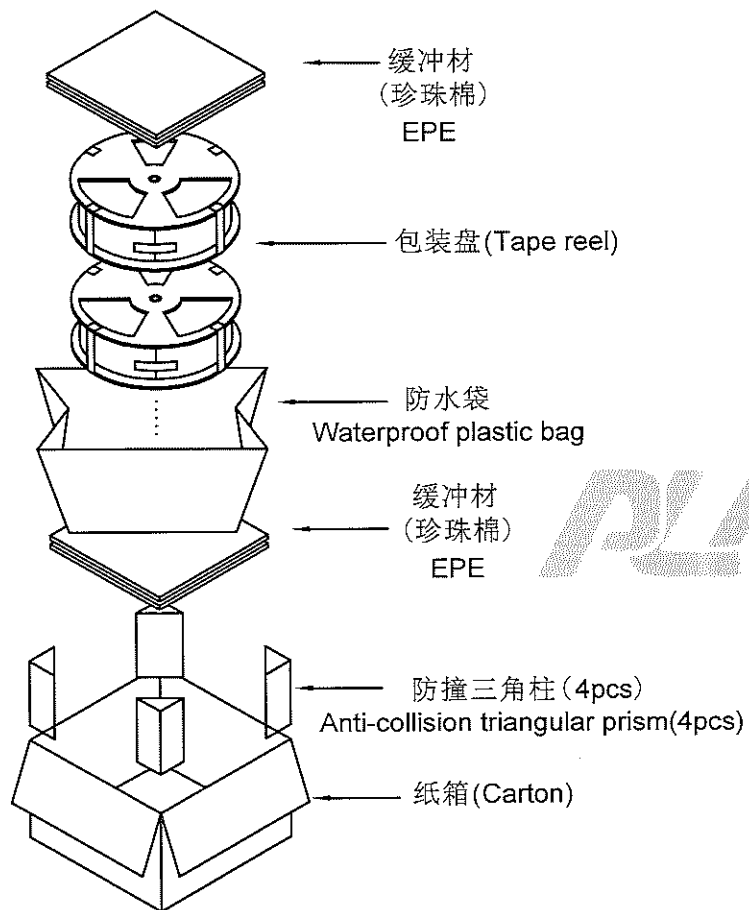

VIEW 3


备注 (NOTES):

1. 带子引导长度如下.

Lead tape length

转绕方向

Pull out direction

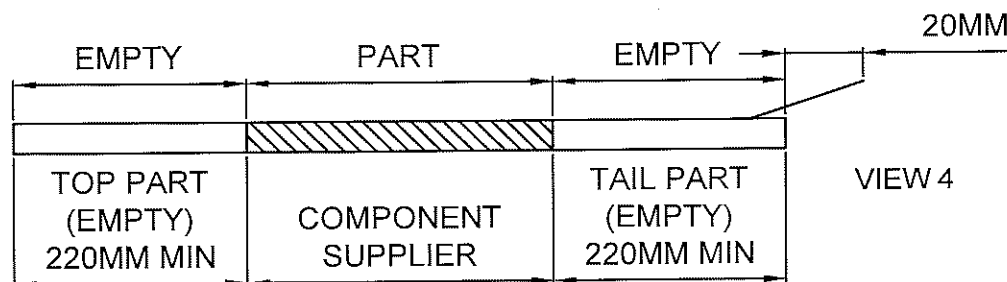


2. 上带剥拉力为: 0.2~1.3N(20gf~130gf)

Peeling off force of top tape :0.2~1.3N(20gf~130gf)

出货运输过程中一定注意: 卷带在运输过程中不能散开

This requirement should be applied at shipment:

The reel tape can not be separated during transportation.

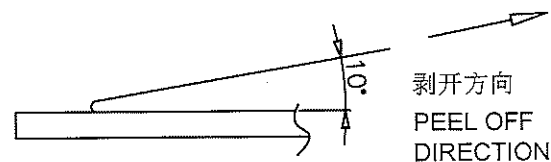

VIEW 5



TOLERANCE TABLE

X. ± 0.30	X.° ± 3°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	

SCALE 1:1

UNIT mm

SIZE A4

DRAWN

张文浩

DATE

2024/03/27

CHECK

126304

DATE

2024/03/28

APPROVE

2024/03/28

DATE

2024/03/28

DWG. NO.

600-0000-2397

PARTS NO.(INTENDED USE)

LCRAAXXXRX00

TITLE

CUSTOMER DRAWING

REV.

2

SHEET

3/3