


DETAIL H
SCALE 4:1



TOLERANCE TABLE		SCALE 2:1		DRAWN 张文浩		DATE 2024/03/28		DWG. NO. 461-0000-0292		TITLE		REV. 3	
X. ± 0.30	X.° ± 3°	UNIT mm		CHECK 1/2024/03/29		DATE 2024/03/29		PARTS NO.(INTENDED USE)		CUSTOMER DRAWING		SHEET 1/3	
.X ± 0.25	.X.° ± 2°	SIZE A4		APPROVE 1/2024/03/29		DATE 2024/03/29		LCNAAXXXBX00					
.XX ± 0.20													

版次	ECN 编码	描述		设计/日期
2	EL24010056	改前	改后	江蒙_2024/01/29
		增加厚金区域		
3	EL24030059	增加包装规范		张文浩_2024/03/28

NOTES: (Unless otherwise specified)


1. Dimension shall be interpreted per ANSI Y14.5M.
2. Materials:
Insulator material: LCP, UL 94V-0;Color:Black.
Contact material: Copper alloy.
3. Current Rating: 1.7A.
4. Voltage Rating: 30V AC/DC.
5. Working Temperature: -55°C ~ +125°C.
6. Harmful material should be compliant to doc.
"EI-0005" standards.
7. Product number matrix:

LCNAAXXXBX00

Number of contacts-

Plating Code:

Definition		Code	
⊗ Tin plated		A	
⊗ Gold plated:			
flash	B	5u"	D 10u"
15u"	F	20u"	G 30u"
⊗ Duplex plating:			
flash	K	5u"	M 10u"
15u"	P	20u"	Q 30u"
⊗ Standard: B			
⊗ All plating is lead free.			

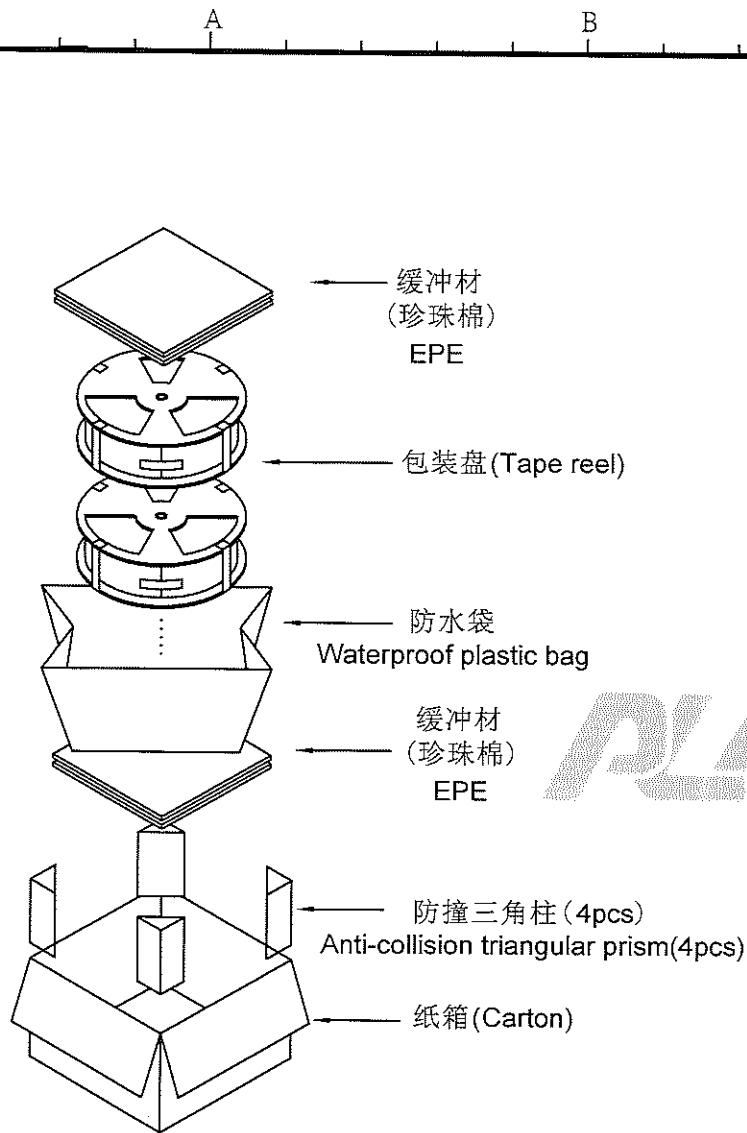

VIEW 3


备注 (NOTES):

1. 带子引导长度如下.

Lead tape length

转绕方向

Pull out direction

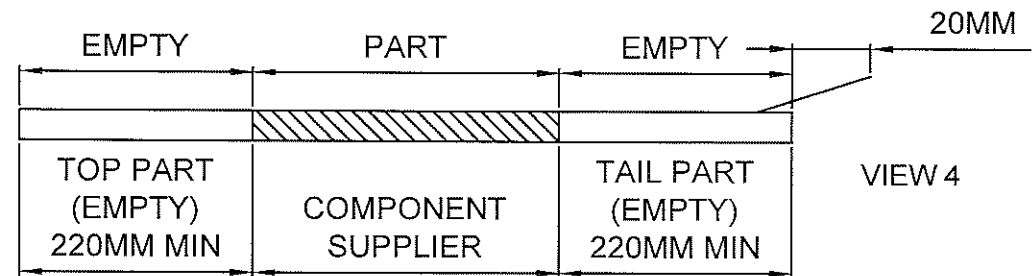


2. 上带剥拉力为: 0.2~1.3N(20gf~130gf)

Peeling off force of top tape :0.2~1.3N(20gf~130gf)

出货运输过程中一定注意: 卷带在运输过程中不能散开

This requirement should be applied at shipment:

The reel tape can not be separated during transportation.

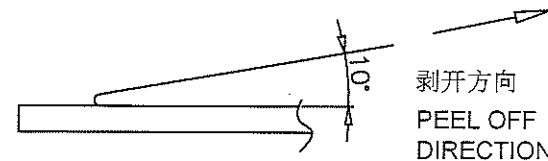

VIEW 5

PLASTREN

TOLERANCE TABLE

X. ± 0.30	X.° ± 3°
.X ± 0.25	.X° ± 2°
.XX ± 0.20	

SCALE 1:1

UNIT mm

SIZE A4

DRAWN

张文浩

DATE

2024/03/28

CHECK

何晓明

DATE

2024/03/28

APPROVE

何晓明

DATE

2024/03/29

DWG. NO.

461-0000-0292

PARTS NO.(INTENDED USE)

LCNAAXXXBX00

TITLE

CUSTOMER DRAWING

REV.

3

SHEET

3/3